

## UNO Down Light



The new standard range of LED UNO Recessed Downlight. There are a selection of sizes and 3 color temperature switchable options to meet customer requirements. With this range of down light can be upgraded in key segments such as office, commercial buildings, retail back office, hospitality. Easy choice to make switch to LED and benefit from energy saving and longer life time.

# Specification : UNO Recessed Downlight (Back-Lit)

## LED & Optical

- Output Range : 600 – 1600lm
- Photometric Options : 110 degree
- System Efficacy : up to 90LPW
- CCT : 3000K/4000K/5700K Switchable
- Operation Temp : -10 ~ 40°C

## Applications

- Commercial Building
- Convenience Store
- Office
- Household

## Electrical

- Input voltage : 220-240V
- Input Frequency :50/60Hz
- Power Factor >0.5

## Warranty

- Rated Life : 25khrs
- Warranty : 2 Years
- Certification : CB certified


## Order Logic:

| Product ID                           | Sizes               | CCT                      | Wattage    | Type          |
|--------------------------------------|---------------------|--------------------------|------------|---------------|
| UNRR - UNO Down Light Recessed Round | 4D/6D/8D - 4"/6"/8" | 3CCT - 3000K/4000K/5700K | 7W/14W/18W | BL - Back Lit |

## SKU# & Order Description:

| SKU#     | Description       | Watt (W) | CCT (K) | Lumens | Voltage   | P.F   | LPW | Beam Angle | CRI | Mounting | Dimension   | Cut Out Size | Qty/Ctn   |
|----------|-------------------|----------|---------|--------|-----------|-------|-----|------------|-----|----------|-------------|--------------|-----------|
| 93133839 | UNORR4D3CCT7W-BL  | 7        | 3CCT    | 600    | 220 - 240 | > 0.5 | 86  | 110°       | 80  | Recessed | Ø110 x 46   | Ø105         | 10pcs/Box |
| 93133840 | UNORR6D3CCT14W-BL | 14       | 3CCT    | 1200   | 220 - 240 | > 0.5 | 93  | 110°       | 80  | Recessed | Ø165 x 48.5 | Ø155         | 10pcs/Box |
| 93133841 | UNORR8D3CCT18W-BL | 18       | 3CCT    | 1600   | 220 - 240 | > 0.5 | 89  | 110°       | 80  | Recessed | Ø220 x 50   | Ø205         | 8pcs/Box  |

## Dimension:

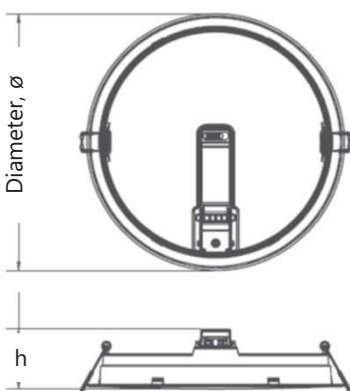

**Recessed  
(Back Lit)**

## Photometric:

