



ECO High-Bay GEN II

The ECO High Bay is our is in exceptional mixture of value and performance. Ideal for High-Bay and Low-bay application in industrial and commercial buildings. Design to replace HID from 150 – 400W.

Specification :

LED & Optical

- Output Range : 9600 – 24600lm
- Photometric Options : 60 & 90 degree
- System Efficacy : 120LPW
- CCT : 4000K/5000K @ 70CRI
- Operation Temp : -40 ~ 45°C

Electrical

- Input voltage : 100-240 V
- Input Frequency :50/60Hz
- Power Factor >90%
- IP Rated : IP65

Construction & Finishing

- Die Cast housing with corrosion resistant polyester powder paint, Standard colors: Gray

Applications

- Warehouse
- Production
- Convention Center


Warranty

- System Warranty : 5 Year
- Certification : CE \ CB certified

Order Description:


SKU#	Order Logic	Watt (W)	Voltage (V)	CCT	Lumen Output	LPW	CRI	Dimension (mm)	Beam Angle	Lifetime (hrs)	Qty/Ctn
43662	EKYHBO50100W90D	100	100-240	5000	12,000	120	70	Ø330 x 245mm	90°	50k	1pcs/Box
88618	EKYHBO50150W90D	150	100-240	5000	18,000	120	70	Ø380 x 285mm	90°	50k	1pcs/Box
88620	EKYHBO50200W90D	200	100-240	5000	24,000	120	70	Ø415 x 300mm	90°	50k	1pcs/Box
42732	EKYHBO50100W60D	100	100-240	5000	12,000	120	70	Ø330 x 245mm	60°	50k	1pcs/Box
92250	EKYHBO50150W60D	150	100-240	5000	18,000	120	70	Ø380 x 285mm	60°	50k	1pcs/Box
44242	EKYHBO50200W60D	200	100-240	5000	24,000	120	70	Ø415 x 300mm	60°	50k	1pcs/Box
40904	EKYHBO40100W90D	100	100-240	4000	12,000	120	70	Ø330 x 245mm	90°	50k	1pcs/Box
89678	EKYHBO40150W90D	150	100-240	4000	18,000	120	70	Ø380 x 285mm	90°	50k	1pcs/Box
89682	EKYHBO40200W90D	200	100-240	4000	24,000	120	70	Ø415 x 300mm	90°	50k	1pcs/Box
40511	EKYHBO40100W60D	100	100-240	4000	12,000	120	70	Ø330 x 245mm	60°	50k	1pcs/Box
41373	EKYHBO40150W60D	150	100-240	4000	18,000	120	70	Ø380 x 285mm	60°	50k	1pcs/Box
41378	EKYHBO40200W60D	200	100-240	4000	24,000	120	70	Ø415 x 300mm	60°	50k	1pcs/Box

Product Dimension:

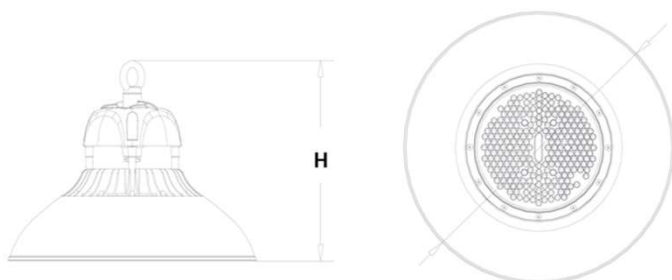


Photometric

D



▪ 90 Degree



▪ 60 Degree