

# ECO-Plus Flood Light



## Specification:

### LED & Optical

- Power : 30W/50W/100W/150W/200W
- Output Range : 2400-16000lm
- Photometric Options : 120°
- System Efficacy : 80 LPW
- CCT : 3000K/4000K/6500K @ 70CRI


### Electrical

- Input voltage : 220-240VAC
- Input Frequency : 50/60Hz
- Power Factor >90%
- Warranty : 2 Years
- Lifetime : 50K Hrs

### Ratings

- IP Rated : IP65
- Working Temperature : -20°C ~ +45°C

## Product Dimension:

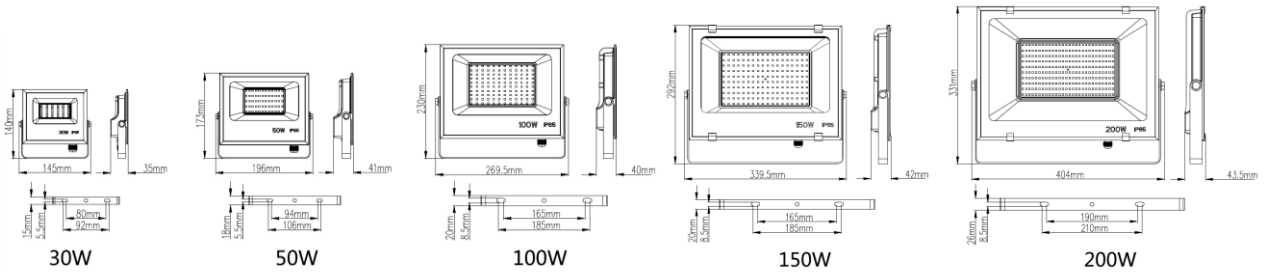

## Order Logic:

Product ID	Wattage (W)	CCT (K)	Driver
EPFL-ECO-Plus Flood Light	30	3000	Class1=DC
	50	4000	Linear=AC
	100	6500	
	150		
	200		

## Order Description:

Description	Watt (W)	Voltage (V)	Driver	CCT (k)	Lumen (lm)	Efficiency (lm/w)	Beam Angle	P.F	CRI	Lifetime (Hrs)	Qty/Ctn
EPFL30W30KDC	30	220-240	Class1	3000	2400	80	120°	> 0.9	70	50k	20pcs/Box
EPFL30W40KDC	30	220-240	Class1	4000	2400	80	120°	> 0.9	70	50k	20pcs/Box
EPFL30W65KDC	30	220-240	Class1	6500	2400	80	120°	> 0.9	70	50k	20pcs/Box
EPFL50W30KDC	50	220-240	Class1	3000	4000	80	120°	> 0.9	70	50k	16pcs/Box
EPFL50W40KDC	50	220-240	Class1	4000	4000	80	120°	> 0.9	70	50k	16pcs/Box
EPFL50W65KDC	50	220-240	Class1	6500	4000	80	120°	> 0.9	70	50k	16pcs/Box
EPFL100W30KDC	100	220-240	Class1	3000	8000	80	120°	> 0.9	70	50k	8pcs/Box
EPFL100W40KDC	100	220-240	Class1	4000	8000	80	120°	> 0.9	70	50k	8pcs/Box
EPFL100W65KDC	100	220-240	Class1	6500	8000	80	120°	> 0.9	70	50k	8pcs/Box
EPFL150W30KDC	150	220-240	Class1	3000	12000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL150W40KDC	150	220-240	Class1	4000	12000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL150W65KDC	150	220-240	Class1	6500	12000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL200W30KDC	200	220-240	Class1	3000	16000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL200W40KDC	200	220-240	Class1	4000	16000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL200W65KDC	200	220-240	Class1	6500	16000	80	120°	> 0.9	70	50k	6pcs/Box

## Order Description:

Description	Watt (W)	Voltage (V)	Driver	CCT (k)	Lumen (lm)	Efficiency (lm/w)	Beam Angle	P.F	CRI	Lifetime (Hrs)	Qty/Ctn
EPFL30W30KAC	30	220-240	Linear	3000	2400	80	120°	> 0.9	70	50k	20pcs/Box
EPFL30W40KAC	30	220-240	Linear	4000	2400	80	120°	> 0.9	70	50k	20pcs/Box
EPFL30W65KAC	30	220-240	Linear	6500	2400	80	120°	> 0.9	70	50k	20pcs/Box
EPFL50W30KAC	50	220-240	Linear	3000	4000	80	120°	> 0.9	70	50k	16pcs/Box
EPFL50W40KAC	50	220-240	Linear	4000	4000	80	120°	> 0.9	70	50k	16pcs/Box
EPFL50W65KAC	50	220-240	Linear	6500	4000	80	120°	> 0.9	70	50k	16pcs/Box
EPFL100W30KAC	100	220-240	Linear	3000	8000	80	120°	> 0.9	70	50k	8pcs/Box
EPFL100W40KAC	100	220-240	Linear	4000	8000	80	120°	> 0.9	70	50k	8pcs/Box
EPFL100W65KAC	100	220-240	Linear	6500	8000	80	120°	> 0.9	70	50k	8pcs/Box
EPFL150W30KAC	150	220-240	Linear	3000	12000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL150W40KAC	150	220-240	Linear	4000	12000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL150W65KAC	150	220-240	Linear	6500	12000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL200W30KAC	200	220-240	Linear	3000	16000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL200W40KAC	200	220-240	Linear	4000	16000	80	120°	> 0.9	70	50k	6pcs/Box
EPFL200W65KAC	200	220-240	Linear	6500	16000	80	120°	> 0.9	70	50k	6pcs/Box