


Platin Series

Housing and Trim: Die-cast aluminium
 Mounting type: Recess
 Heat Management: Die-cast aluminium heat sink
 Reflector: Aluminium
 Diffuser: Clear glass or Frosted Glass

LED Modules
 GERMAN Technology
 Comfort COB - Up to 1800lm
 Long service life time : 50,000 hours (L80/B10)
 Ambient temperature - 40°C to +40°C

Drivers: 150mA / 250mA / 300mA / 350mA
 (optional: Dimmable available)
 Power factor at full load : 0.97
 SELV , Low Ripple current < 1% ,THD <15%
 Warranty: 5 years

Standards
 EN 620301: LED modules for general lighting - Safety specification
 EN 62471: Photobiological safety of lamps and systems
 EN 55015: Radio disturbance emissions
 EN 61000-3-2 Limited for harmonic emissions
 EN 61547: Immunity requirements

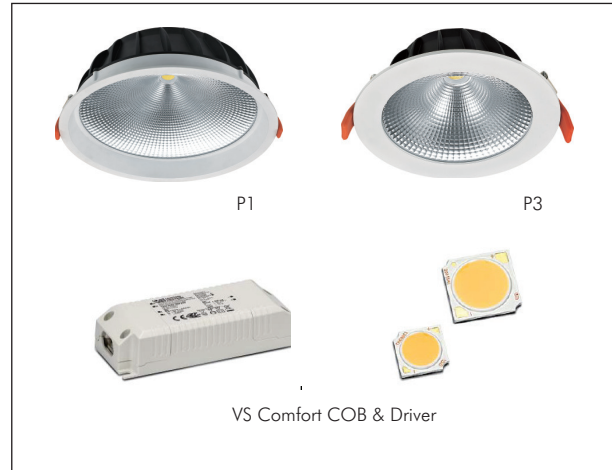

Powered by:



Application: Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	Module Luminous Flux (Lm)	Module Efficacy Lm/W	Typ. Beam Angle	Typ. CRI Ra	Energy Efficiency	Dimension (Dia x H) mm	Dimension (Cut out) mm
P1-3-4W P3-3-4W	4.2W	220-240	50/60Hz	0.95	Warm white	2700K	615	148	40	>82	A+	110 x 60 110 x 40	100
		220-240	50/60Hz	0.95	Warm white	3000K	645	155	40	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	665	160	40	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	670	161	40	>82	A+		
P1-3-7W P3-3-7W	7.3W	220-240	50/60Hz	0.95	Warm white	2700K	965	133	70	>82	A+	110 x 60 110 x 40	100
		220-240	50/60Hz	0.95	Warm white	3000K	1015	140	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	1045	144	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	1055	145	70	>82	A+		
P1-4-10W P3-4-10W	10.3W	220-240	50/60Hz	0.95	Warm white	2700K	1505	146	70	>82	A+	140 x 70 140 x 50	130
		220-240	50/60Hz	0.95	Warm white	3000K	1585	154	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	1630	158	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	1645	160	70	>82	A+		
P1-4-12W P3-4-12W	12.2W	220-240	50/60Hz	0.95	Warm white	2700K	1720	141	70	>82	A+	140 x 70 140 x 50	130
		220-240	50/60Hz	0.95	Warm white	3000K	1810	149	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	1865	153	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	1885	155	70	>82	A+		

*Colour tolerance: 3 MacAdam **Production tolerance of luminous flux and efficiency: ±10% ***Min. CRI ±3% ****Power consumption: ±10%
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.


Platin Series

Housing and Trim: Die-cast aluminium
 Mounting type: Recess
 Heat Management: Die-cast aluminium heat sink
 Reflector: Aluminium
 Diffuser: Clear glass or Frosted Glass

LED Modules
 GERMAN Technology
 Comfort COB - Up to 3800lm
 Long service life time : 50,000 hours (L80/B10)
 Ambient temperature - 40°C to +40°C

Drivers: 400mA / 500mA / 600mA / 700mA
 (optional: Dimmable available)
 Power factor at full load : 0.97
 SELV , Low Ripple current < 1% ,THD <15%
 Warranty: 5 years

Standards
 EN 620301: LED modules for general lighting - Safety specification
 EN 62471: Photobiological safety of lamps and systems
 EN 55015: Radio disturbance emissions
 EN 61000-3-2 Limited for harmonic emissions
 EN 61547: Immunity requirements

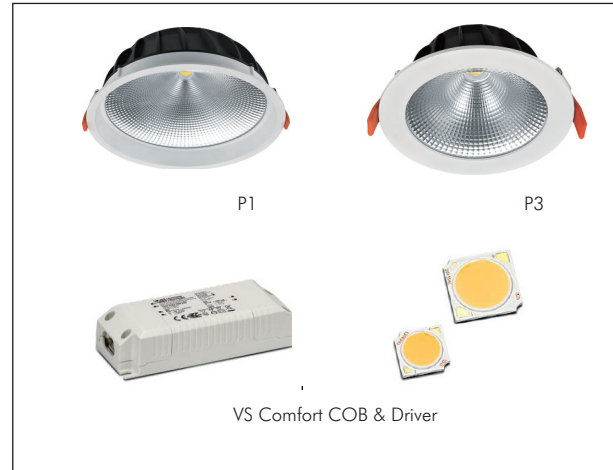

Powered by:



Application: Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	Module Luminous Flux (Lm)	Module Efficacy Lm/W	Typ. Beam Angle	Typ. CRI Ra	Energy Efficiency	Dimension (Dia x H) mm	Dimension (Cut out) mm
P1-5-14W P3-5-14W	14.1W	220-240	50/60Hz	0.95	Warm white	2700K	1930	137	70	>82	A+	170 x 75 170 x 55	160
		220-240	50/60Hz	0.95	Warm white	3000K	2030	144	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	2090	148	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	2110	149	70	>82	A+		
P1-6-17W P3-6-17W	17.3W	220-240	50/60Hz	0.95	Warm white	2700K	2585	149	70	>82	A+	190 x 80 190 x 60	175
		220-240	50/60Hz	0.95	Warm white	3000K	2725	158	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	2805	162	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5000K	2860	165	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	2830	164	70	>82	A+		
P1-6-21W P3-6-21W	21.2W	220-240	50/60Hz	0.95	Warm white	2700K	3030	143	70	>82	A+	190 x 80 190 x 60	175
		220-240	50/60Hz	0.95	Warm white	3000K	3185	151	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	3280	155	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5000K	3345	158	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	3315	157	70	>82	A+		
P1-8-25W P3-8-25W	25.1W	220-240	50/60Hz	0.95	Warm white	2700K	3445	137	70	>82	A+	230 x 85 230 x 65	210
		220-240	50/60Hz	0.95	Warm white	3000K	3625	144	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	3730	148	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5000K	3805	151	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	3765	150	70	>82	A+		

*Colour tolerance: 3 MacAdam **Production tolerance of luminous flux and efficiency: ±10% ***Min. CRI ±3% ****Power consumption: ±10%
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.

Platin Series

Housing and Trim: Die-cast aluminium
 Mounting type: Recess
 Heat Management: Die-cast aluminium heat sink
 Reflector: Aluminium
 Diffuser: Clear glass or Frosted Glass

LED Modules
 GERMAN Technology
 Comfort COB - Up to 5500lm
 Long service life time : 50,000 hours (L80/B10)
 Ambient temperature - 40°C to +40°C

Drivers: 900mA / 1050mA
 (optional: Dimmable available)
 Power factor at full load : 0.97
 SELV , Low Ripple current < 1% ,THD <15%
 Warranty: 5 years

Standards
 EN 620301: LED modules for general lighting - Safety specification
 EN 62471: Photobiological safety of lamps and systems
 EN 55015: Radio disturbance emissions
 EN 61000-3-2 Limited for harmonic emissions
 EN 61547: Immunity requirements



Powered by:



Application: Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	Module Luminous Flux (Lm)	Module Efficacy Lm/W	Typ. Beam Angle	Typ. CRI Ra	Energy Efficiency	Dimension (Dia x H) mm	Dimension (Cut out) mm
P1-10-32W P3-10-32W	32.0W	220-240	50/60Hz	0.95	Warm white	2700K	4455	139	70	>82	A+	260 x 90 260 x 70	240
		220-240	50/60Hz	0.95	Warm white	3000K	4690	147	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	4830	151	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5000K	4920	154	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	4875	152	70	>82	A+		
P1-10-38W P3-10-38W	38.0W	220-240	50/60Hz	0.95	Warm white	2700K	5045	133	70	>82	A+	260 x 90 260 x 70	240
		220-240	50/60Hz	0.95	Warm white	3000K	5310	140	70	>82	A+		
		220-240	50/60Hz	0.95	Neutral white	4000K	5465	144	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5000K	5575	147	70	>82	A+		
		220-240	50/60Hz	0.95	Cool white	5700K	5520	145	70	>82	A+		

*Colour tolerance: 3 MacAdam **Production tolerance of luminous flux and efficiency: ±10% ***Min. CRI ±3% ****Power consumption: ±10%
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.